

# Arrow Dead-Bolt Locks



## D Series - General Specifications

Housing – Two-piece housing, with free-spinning outer ring to prevent wrenching. Concealed mounting screws are standard on double cylinder functions.

Deadbolt – 1" (25.40mm), solid steel deadbolt throw with hardened steel pin.

Backset – 2-3/8" (60.32mm), 2-3/4" (69.85mm).


Deadbolt fronts – 2-1/4" (57.15mm) x 1" (25.40mm) standard for 2-3/8" (60.32mm) backset, 2-1/4" (57.15mm) x 1-1/8" (28.57mm) standard for 2-3/4" (69.85mm) backset. Drive-in deadbolts are available.

Doors – 1-3/8" (34.925mm) to 1-3/4" (44.45mm) thick standard.

Strikes – Supplied standard with two strikes. #345–security strike for steel frame. #346–security strike for wood frame.

Handing – All functions are reversible.

Cylinder, Standard – Solid brass, Arrow "A" keyway, 6 pins. Supplied with two nickel silver keys.

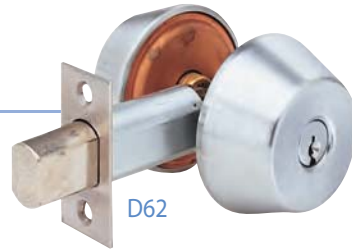

D62



D61 Single Cylinder Deadlock (Interior) Thumbturn

Cylinder Options – Accepts 6 or 7 pin interchangeable cores. Supplied less cores. Will accept Best™ or Falcon™ type cores.

Finish – US3, US4, US5, US10, US10B, US26, US26D

Certification & Compliance – ANSI A156.5, Auxiliary Locks, Grade 1. Underwriters Laboratories (UL and CUL) listed for use on A label or lesser doors when used in conjunction with a rated primary latching device

Packaging – 12 per case

## E Series - General Specifications

Housing – Two-piece housing, with free spinning outer ring to prevent wrenching. Concealed mounting screws standard on double cylinder functions.

Thru-bolting – supplied with two 1/4" (6.35mm) steel thru-bolts.

Deadbolt – 1" (25.40mm), solid steel deadbolt throw with hardened steel pin insert.

Backset – 2-3/8" (60.32mm), 2-3/4" (69.85mm).

Deadbolt fronts – 2-1/4" (57.15mm) x 1" (25.40mm) standard for 2-3/8" (60.32mm) backset, 2-1/4" (57.15mm) x 1-1/8" (28.57mm) standard for 2-3/4" (69.85mm) backset. Drive-in deadbolts are available.

Doors – 1-3/8" (34.925mm) to 1-3/4" (44.45mm) thick standard.

Strikes – Supplied standard with two strikes. #345–security strike for steel frame. #346–security strike for wood frame.

Handing – All functions are reversible.

Cylinder, Standard – Solid brass, Arrow "A" keyway, drilled for 6 pins, pinned to 5 for stock. Supplied with two keys.



E62



E61 Single Cylinder Deadlock (Interior) Thumbturn

Cylinder Options – Accepts 6 or 7 pin interchangeable cores. Supplied less cores. Will accept Best™ or Falcon™ type cores.

Finish – US3, US4, US5, US10, US10B, US26, US26D

Certification & Compliance – ANSI A156.5, Auxiliary Locks, Grade 2. Underwriters Laboratories (UL and CUL) listed for use on A label or lesser doors when used in conjunction with a rated primary latching device.

Packaging – 24 per case