

Cabinet Lock CL1200--Technical Specifications

6025 Cinderlane Parkway • Orlando FL 32810 • 407.298.9895 • 800.657.LOCK.(5625) • sales@lockingsystems.com

- Power:** 2 - 1.5 AAA Batteries
- Operations:** 50,000 Openings
- Low Battery:** When lock signals "Low Battery" there will be 100 additional openings.
- Memory:** Non-Volatile memory will be retained when changing batteries.
- Battery Override:** A 9volt battery can be placed against the external contacts.
- Material:** Zinc Alloy
- Door Thickness:** 1/4" (6mm) up to 1" (25mm)
- Buttons:** Stainless steel buttons with audible press.
- Finish:** Silver Grey
- Codes:** Cabinet Lock gas 4 code levels; Master code, Sub-Master Code, User Code and Technician Code.
- Auto-Unlock:** Lock can be programmed to open after a preset time 2,4,6,8,10 hours.

Codes:
The cabinet locks codes supplies with two factory preset codes.

Master Code: 11 33 55 77

User Code: 22 44

Change both codes after lock has been installed.

All Master Codes are 8 digits long.

All User Codes are 4 digits long.



Functions:


Repeat Code Mode.....

This is the default function and programmed in all new locks. This is used when the same codes will be repeatedly used.

Single User Mode (Locker Mode)

The user enters a single use code to open the lock one time, then will be erased. This is used for short term use such as lockers.

The lock will now remain open until the next single code is entered into the lock.

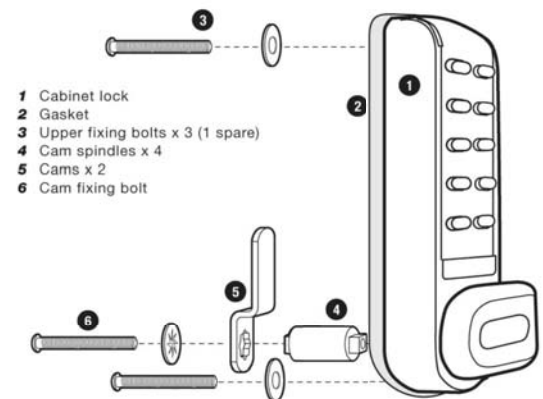

External Dimensions:

Length: 5 3/8" (141mm)

Width: 1 5/8" (41mm)

Depth: 1 1/2" (38mm)

1 1/2" to Top of Handle